

MAG2500 & MAG5000 Combined electromagnet & handle

With the Locinox MAG2500 & MAG5000 electromagnetic lock, everything is included to give your customer a durable and reliable electromagnetic lock with a stylish appearance to compliment their gate.

All MAG lock edges are rounded making MAG2500/5000 locks ideal for schools, narrow gate installations and most other gate applications.

Specify for access control applications where sharp edges projecting into the gate aperture are unacceptable, welding facilities are not available and appearance is important.

Accessories:





Key features:

250 kg and 500 kg holding force options

Every MAG lock force tested at factory

Residual magnetism (remanence) ejection system

Can be wired 12V DC or 24V DC

460 mA (12V) or 230 mA (24V) current demand

Anti-prise magnet housing edges

Salt spray tested two-layer protective coating

Easy to install Quick-Fix fasteners - no welding

Suitable for 40-80 mm box section gate frames

500.000 TESTED



STAINLESS STEEL








MAG2500 & MAG5000

Combined electromagnet & handle



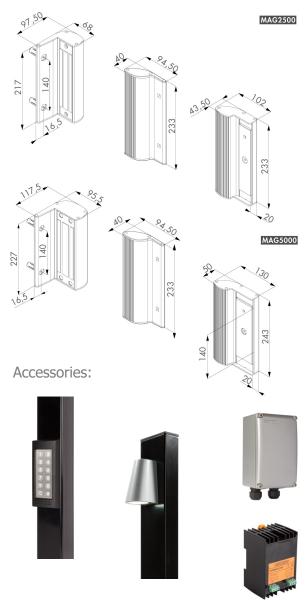


MAG2500 - 250 kg holding force MAG5000 - 500 kg holding force

ZILV Silver

RAL6005 Moss Green

RAL9005 Black

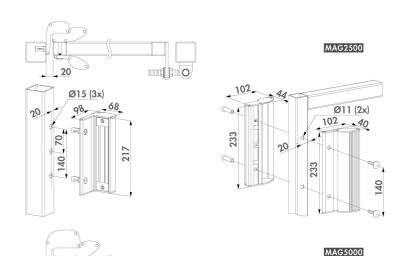

SLIMSTONE-9005 Keypad in black finish
SLIMSTONE-ZILV Keypad in silver finish
PB-1-9005 Housing for power supply in black


DC-POWER-12V-20W Power supply 12V DC, 20W DC-POWER-24V-25W Power supply 24V DC, 25W

Housing for power supply in silver

TRICONE-9005 LED lamp in black
TRICONE-ZILV LED lamp in silver

PB-1-ZILV

All gate closers supplied by Gate Control Gear are suitable for use with MAG2500 and MAG5000 locks



20

140

Ø15 (3x)